


MultiSync® E805 SST (ShadowSense) LCD 80" Entry Level Large Format Touch Display

Datasheet

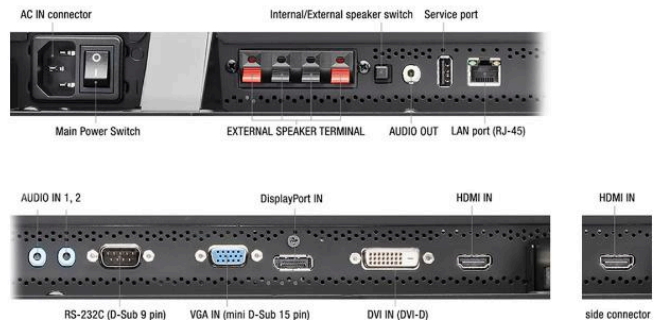

NEC MultiSync® E805 SST - One display fits all - The Next Generation Digital Interactive Whiteboard

Seamless operation of presentation systems and whiteboards is essential to achieving productivity, allowing you to concentrate on business and not on technology. The 80" eye-pleasing multi-touch-display with 350 cd/m² brightness offers the ideal digital canvas to facilitate creative and efficient collaboration in smaller-sized corporate meeting rooms or classrooms. ShadowSense™ technology with 10 real-time touch points, allows several people to interact in parallel which leads to much more efficient working results. Bundle the display with a Windows-based OPS Slot-in-PC for a simple and seamless solution.

Benefits

Intuitive Touch Behaviour – benefit from Windows Ink supported automatic recognition of interactions, whether touch gestures, pen writing or erasing, in MS Office applications.

Simple Plug & Play – easy set-up without the need to install any drivers on the host PC for all major operating systems.

Ease of Use – enhance the display with an optional “Windows based” Slot-in-PC using the integrated Ultra High Resolution OPS option slot, thereby simplifying installations and reducing the points of failure.

Save Time and Work more Efficiently – ShadowSense™ touch technology offers real-time collaboration in meetings, tracking all 10 touch points with the highest touch point accuracy.

Reliability at High Ambient Light Operation – enhanced filtering and special sensors allow operation even in the brightest ambient light conditions without causing ghost touches.

Product Information

Product Name	MultiSync® E805 SST (ShadowSense)
Product Group	LCD 80" Entry Level Large Format Touch Display
Order Code	60003923

Display

Panel Technology	UV ² A with Edge LED backlight
Active Screen Area (W x H) [mm]	1.771 x 996
Screen Size [inch/cm]	80 / 203
Brightness [cd/m ²]	300, (350 max)
Contrast Ratio (typ.)	5000:1
Viewing Angle [°]	178 horizontal / 178 vertical (typ. at contrast ratio 10:1)
Response Time (typ.) [ms]	4 (grey-to-grey)
Haze Level [%]	5
Supported Orientation	Landscape

Synchronisation Rate

Horizontal Frequency [kHz]	31.5 - 91.1 (analog and digital)
Vertical Frequency [Hz]	50 - 85

Resolution

Native Resolution	1920 x 1080 at 60 Hz			
Supported on DisplayPort and HDMI	1920 x 1080; 1600 x 1200; 1360 x 768; 1280 x 1024;	1280 x 768; 1080i; 1080p; 1024 x 768;	800 x 600; 720p (50/60 Hz); 640 x 480; 576p (50 Hz);	480p (60 Hz)
Supported on HDMI only	1360 x 768;	576i (50 Hz);	480i (60 Hz)	

Connectivity

Input Video Analogue	1 x D-sub 15 pin
Input Video Digital	1 x DisplayPort (with HDCP); 1 x DVI-D (with HDCP); 2 x HDMI (with HDCP)
Input Audio Analogue	2 x 3,5 mm jack
Input Audio Digital	1 x DisplayPort; 2 x HDMI
Input Control	LAN 100Mbit; RS232
Output Audio Analogue	3,5mm jack
Remote Control	LAN with SNMP; RS-232C (9-pin D-sub) Input

Sensors

Ambient Light Sensor	Integrated, triggered actions programmable
Temperature Sensor	Integrated, 3 sensors, triggered actions programmable

Electrical

Power Consumption Eco/max. [W]	227 Eco (shipment setting), 442
Power Savings Mode [W]	< 0.5 (ECO Standby); < 1
Power Management	VESA DPMS

Environmental Conditions

Operating Temperature [°C]	+0 to +35
----------------------------	-----------

Operating Humidity [%]	20 to 80
------------------------	----------

Mechanical

Dimensions (W x H x D) [mm]	Without stand: 1,878 x 1,097 x 104
Weight [kg]	Without stand: 85
Bezel Width [mm]	40 (left and right); 40 (top and bottom)
VESA Mounting [mm]	4 holes; 400 x 400 (FDMI); M8

Glass

Thickness [mm]	5
Type	Premium toughened glass, single sided anti-reflective coating
Light Transmission [%]	92 (+/- 2 %)

Touch

Touch Technology	ShadowSense™ Touch
Number of Touches	Real multi-touch up to 10 touches
Response Time [ms]	6 to 8
Touch Active Area (W x H) [mm]	1,796.88 x 1,015.84
Touch Method	Finger; Gloves; Stylus (≥ 4 mm)
Supported Operating System	Native Multi-Touch: Windows 7, Windows 8, Windows 10, Linux, Android; Default Mouse: Windows XP, Windows Vista, Mac OS X
Data Interface	USB 2.0 (full speed) HID; USB powered, plug & play
Accuracy [mm]	< 2
Touch Resolution	12-bit (4096 x 4096)
Ambient Light Rejection	Up to full sunlight (approx. 100000 lux)

Available Options

Accessories	Feet (ST-801); Speaker (SP-TF1, SP-RM1); Trolley (PD02MHA, PD03MHA); Wall mount (PDW T XL, PD02WHA)
OPS Slot	HD-SDI 1.5G; 3G; HDBaseT receiver; OPS Digital Signage Player; Slot-inPC (Intel® Core i5/i7 with WS7P recommended)

Green Features

Energy Efficiency	Ambient light sensor; Annual energy consumption: 331 kWh (based on 4 operating hours per day); Carbon savings meter; ECOMode; Energy efficiency class: A
Ecological Materials	Manuals on CD; Optional feet

Additional Features

Special Characteristics	Automatic Alarm E-Mails; Colour temperature mode; Image flip; NaViSet Administrator 2; Point Zoom Function; Scheduler
Colour Versions	Black Front Bezel, Black Back Cabinet
Safety and Ergonomics	CE; RoHS
Audio	Integrated Speakers (10 W + 10 W); Optional Speakers (15 W + 15 W)
Shipping Content	CD-ROM (User Guides/Manuals); Display; DVI-D cable; Pen and Eraser; Power Cable; Remote Control; USB cable
Warranty	3 years warranty incl. backlight; additional services available; optional 4. + 5. year warranty extension
Operating Hours	12/7



CE



RoHS

This document is © 2020 NEC Display Solutions Europe GmbH.

All rights reserved in favour of their respective owners. All hardware and software names are brand names and/or registered trademarks of the respective manufacturers. All specifications are subject to change without notice. Errors and omissions are excepted. 11.10.2020

* Model subject to availability in your region.

For, more information contact:

Display Square

+971 4 3300429

info@displaysquare.com | www.displaysquare.com

DISPLAY SQUARE

Copyright © 2020 Display Square All rights reserved. Specifications and designs are subject to change without notice.
Non-metric weights and measurements are approximate. All data were deemed correct at time of creation. Display Square is not liable for errors or omissions.
All brand, product, service names and logos are trademarks and/or registered trademarks of their respective owners and are hereby recognized and acknowledged.